


Dräger Polaris® 600 Operating Lights

Our OR light is state of the art: The Dräger Polaris® 600 makes your working day a lot easier – with intuitive controls and versatile configuration options. The future-proof system concept remains true to the philosophy of the product family providing you with simply good light.

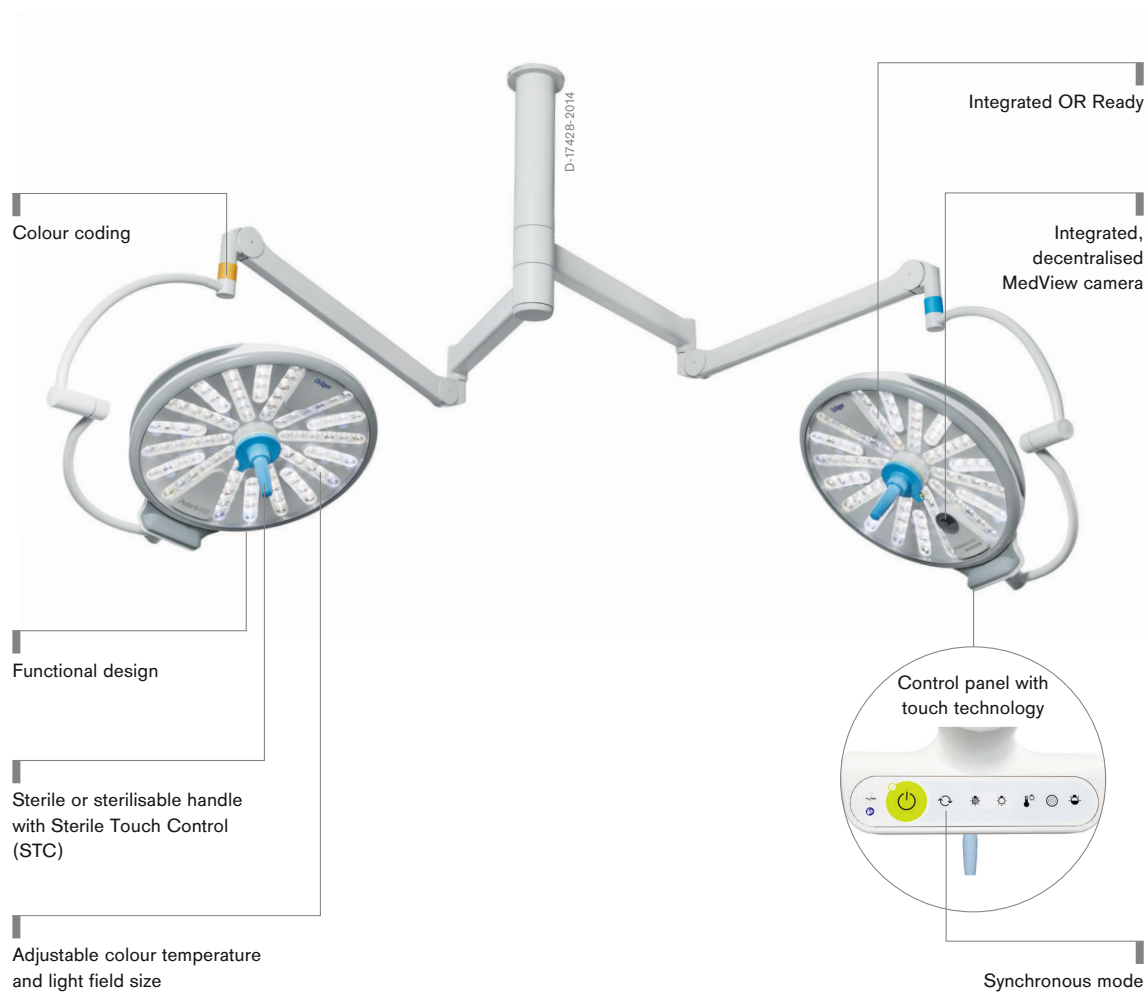

Benefits

Sterile and sterilisable handles for greater independence and flexibility

The handle with Sterile Touch Control (STC) enables you to be independent from non-sterile personnel, allowing you to easily control your OR light on your own. The touch-sensitive technology is located on the top part of the handle for easy access. You can intuitively adjust the light field size or light intensity by double-tapping or sliding gesture respectively, of course while wearing surgical gloves. Using the lower part of the handle, you comfortably position the light for an optimum view. Its polygon shape ensures you a perfect force transfer and easy turning. The handle is designed from a single piece of durable plastic making sterilisation effortless.

The new sterile disposable handle lets you use the Sterile Touch Control (STC) function without any restrictions, and helps you to comply with your individual infection prevention protocols.

Easier operation – also for non-sterile personnel

The entire OR team benefits from the intuitive controls of the touch technology on the light head. The touch-sensitive light control panel allows you to let non-sterile personnel take over operation of the Polaris® 600 without interfering with the light's positioning. The assistant can additionally operate the light via the wall panel instead of having to reach for it. Colour markings above the light head and on the wall panel help to clearly assign the individual controls to the lights. In synchronous mode, the settings are copied to all connected lights. This allows you to quickly and accurately adjust the light intensity and colour temperature of all Polaris 600 lights in the OR.

Exceptional light quality that's easy to adjust

The adjustable colour temperature literally puts every procedure in the right light. The appropriate light is available for every surgical field, depending on the tissue structure, individual perception or surgical application. You can switch between four modes: from warm white to cold white (3800, 4400, 5000 and 5600 Kelvin), in order to help you focus, reduce fatigue or reduce glare during longer procedures. The light field can also be adjusted incrementally: The adjustable diameter quickly provides the right focus and optimal illumination for all types of surgery. Regardless of the surgical team's positioning, the Polaris 600 sheds light on all important details of the surgical site without creating troublesome shadows.

Optional HD Camera with wireless video transfer

Upgrading with a high quality HD camera is possible at any time. The sterile handle no longer has to be replaced, because the camera is located directly in the light head under the transparent cover. The camera automatically adjusts to the current light conditions. Moreover, the 120x zoom delivers razor-sharp images. In addition, an encrypted video signal is transmitted wireless and continuously received in the OR. Operation of the video is performed via remote control and/or wall panel and allows your team to work undisturbed while spectators watch live.

Benefits

Upgrading made simple

The design of the Polaris 600 takes into account both future-oriented technologies and the requirements of previous systems. It is simple to mount a Polaris 600 to an existing Dräger installation.

Similarly, the MedView camera does not require any on-site wiring, making upgrading an effortless task, easily performed by trained technicians. This means that your OR is ready to be used again quickly, so that your procedures will not be disrupted.

The clear, functional design of the Polaris 600 reflects the highest hygiene standards: Its smooth and disinfectant-proof surface and housing with integrated camera is quick and easy to clean.

Centralised control via integrated OR solution

The Polaris 600 is equipped with an integrated OR interface, which allows partners to control our lights and cameras. These integrated OR solutions enable our lighting- and video systems to be operated by partner systems, as well as to save, edit and forward video data conveniently. As a result, sharing your knowledge for training purposes has never been so simple: We help you connect with experts around the world.


The mobile Polaris 600

The mobile Polaris can be deployed in the operating room as an additional, standalone light – such as during cardiovascular procedures when the patient must be operated on in several different places at the same time. The high-quality, mobile light can, of course, also be deployed in emergency cases or in treatment rooms. The mobile Polaris 600 particularly proves its value when there is a lack of infrastructure and a secure, ceiling-mounted installation is not possible. Light intensity and colour temperature are also adjustable on the mobile versions via the light control panel. With up to 160,000 lux and a smooth cardanic mounting for exact positioning, the mobile version has no functional limitations.


Height adjustment supported by pneumatic springs allows for effortless adaptation to transport and operating conditions. In the fully extended position a working height of 2,175 mm is reached under the light head – ideal also for tall surgeons. The transport height of the mobile Polaris 600 is only 1,850 mm, however.

If the mains power supply to the system is lost, the light continues to be fed by the integrated battery with no interruption. The mobile light has up to three hours of battery operating life, which provides security of supply in the case of a power cut. LED status indicators on the chassis also display the status of the power supply and of the battery charge.

Details

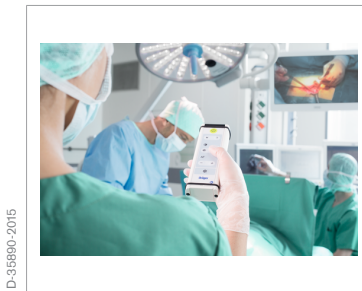


Accessories

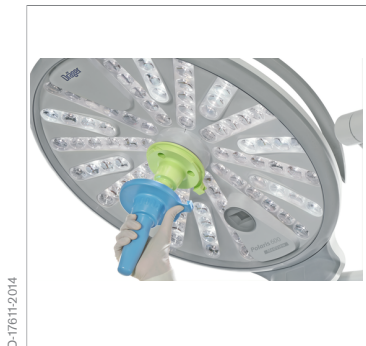

Sterilisable handle

The replaceable handle with Sterile Touch Control (STC) allows the surgeon to adjust the OR light easily and independently from non-sterile personnel. Furthermore, the STC for adjusting the light field size and light intensity is located in the upper part of the handle. Manufactured as a single piece, it is easy to sterilise and can be operated with surgical gloves.

Accessories

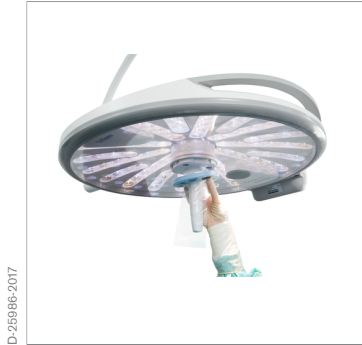

D-25986-2017

Sterile handle

The disposable handle is easy to mount and remove, and allows for full functionality of the handle with Sterile Touch Control (STC). It is only available for Polaris OR lights and display holders.

Related Products



D-5982-2017

Polaris® 100/200

In the operating room, the right illumination is essential for success. The Polaris® 100/200 surgical illumination systems provide cool light with natural colours and rich-contrast for thousands of hours of carefree operation without straining on your hospital's budget.



D-6405-2018

Polaris® Multimedia

Document surgical procedures in standard or professional quality with one of several flexible, standard or high resolution video solutions.

Technical Data

Dräger Polaris® 600

| | |
|---|--|
| Adjustable light intensity | 20,000 – 160,000 lux, 12.5 – 100 % (2 % ambient light) |
| Ee/Ec ratio | 3.6 (mW/m ²) /lx |
| Ambient light intensity | 3,000 lux |
| Adjustable light field size | 19, 23, 28 cm |
| Illumination depth L1 + L2 (20 %) | 1,300 mm |
| Illumination depth L1 + L2 (60 %) | 700 mm |
| Centrally adjustable colour temperature | 3,800, 4,400, 5,000, 5,600 Kelvin |
| Colour rendering index Ra | 95 |
| Colour rendering index R9 | 94 |
| Number of LEDs | 92 in 18 LED modules |
| Service life of the LEDs | 50,000 hours |
| Sterile Touch Control (STC) to control | included |
| - Light intensity | |
| - Light field size | |
| Ergonomically shaped sterilisable or sterile handle | included |
| Light head diameter | 620 mm |

Integrated MedView camera

| | |
|-------------------------------------|--------------------------------|
| Light head is camera upgradable | included |
| Resolution | Full HD (1,920 x 1,080 Pixels) |
| Video outputs per wireless receiver | 2x HD-SDI or 1x HDMI/DVI-D |
| Video transmission | Wireless |

Options

| | |
|--|-----------|
| Display holder for 19" – 32" displays | available |
| Connection and operation via integrated OR systems | available |
| Anti-Reflection Glass | available |

Mechanical data

| | |
|--|----------------|
| Trolley width | approx. 760 mm |
| Height adjustment telescopic tube | 400 mm |
| Trolley height in transport position | 1,850 mm |
| Working height under the light head in operating position | 2,175 mm |
| Weight mobile trolley ² | 130 kg |
| <small>2 Mobile stand. tube, spring arm and light head</small> | |

Electrical data

| | |
|---|--|
| Battery charging time | approx. 24 hours |
| Bridging time in case of power supply failure | approx. 180 minutes (for fully charged battery) |

Notes

Notes

Not all products, features, or services are for sale in all countries.
Mentioned Trademarks are only registered in certain countries and not necessarily in the country in which this material is released. Go to www.draeger.com/trademarks to find the current status.

CORPORATE HEADQUARTERS

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
www.draeger.com

Manufacturer:

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23542 Lübeck, Germany

REGION DACH

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION EUROPE

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
Tel +49 451 882 0
Fax +49 451 882 2080
info@draeger.com

REGION MIDDLE EAST, AFRICA

Drägerwerk AG & Co. KGaA
Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
Tel +971 4 4294 600
Fax +971 4 4294 699
contactuae@draeger.com

REGION ASIA PACIFIC

Draeger Singapore Pte. Ltd.
25 International Business Park
#04-20/21 German Centre
Singapore 609916
Tel +65 6308 9400
Fax +65 6308 9401
asia.pacific@draeger.com

REGION CENTRAL AND SOUTH AMERICA

Dräger Panama S. de R.L.
59 East Street, Nuevo Paitilla
House 30, San Francisco Town
Panama City, Panama
Tel +507 377 9100
Fax +507 377 9130
servicioalcliente@draeger.com

Locate your Regional Sales
Representative at:
www.draeger.com/contact

